

FIG. 2

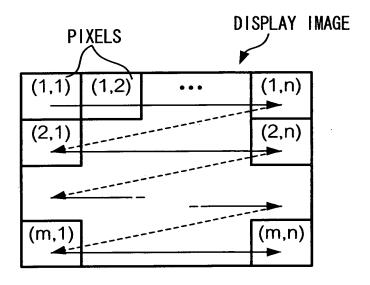
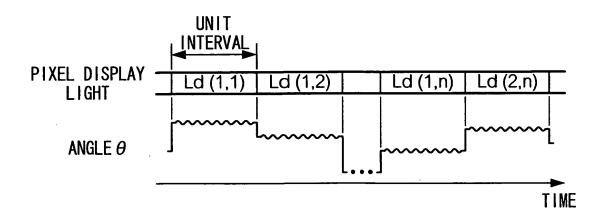


FIG. 3



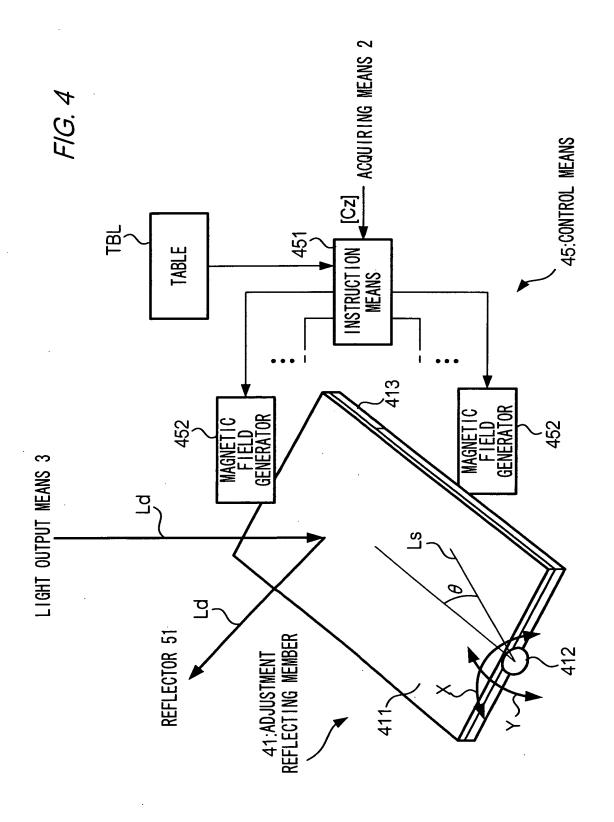
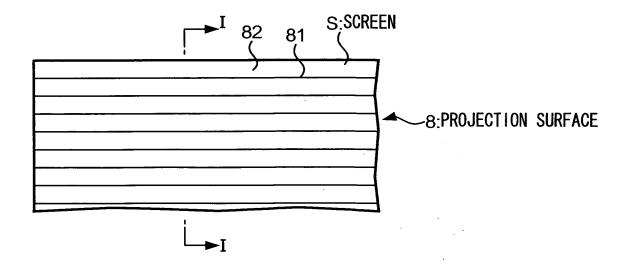


FIG. 5

	TBL \		
DEPTH Value	PIXEL POSITION	DRIVE CONTENT	AMPLITUDE
Cz1	(1,1)	~	Am1
	(1,2)	~	Am2
	:	•	•
Cz2	(1,1)	~	Am1'
	(1,2)	2	Am2'
	•	:	
•	•	:	:

FIG. 6




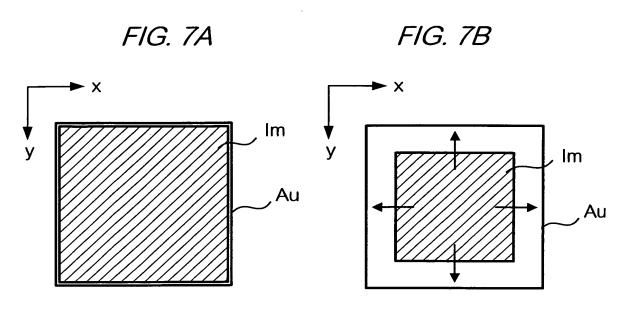


FIG. 8

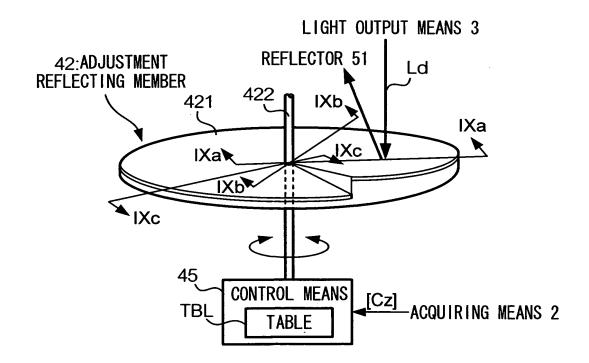

6/14

FIG. 9A

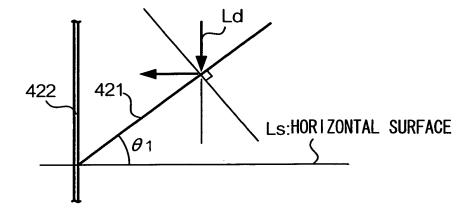


FIG. 9B

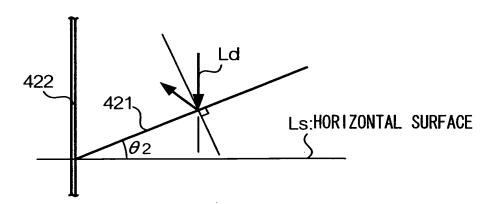


FIG. 9C

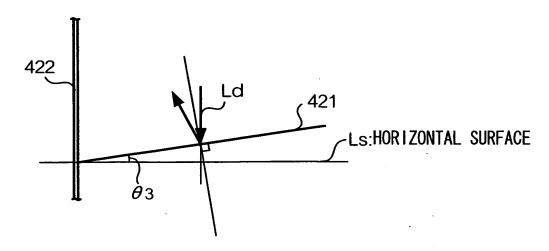


FIG. 10A

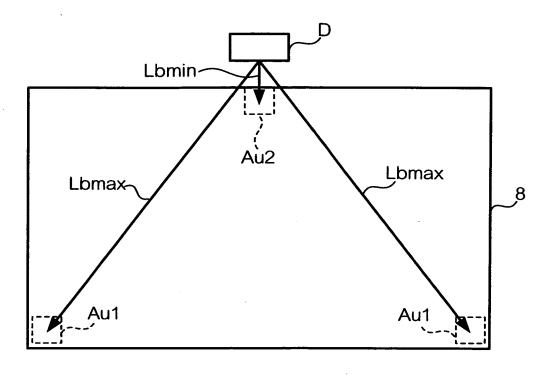


FIG. 10B

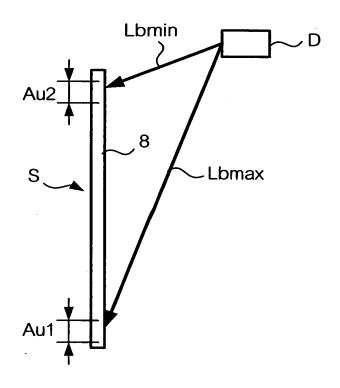


FIG. 11

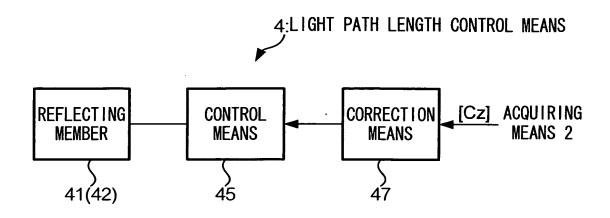
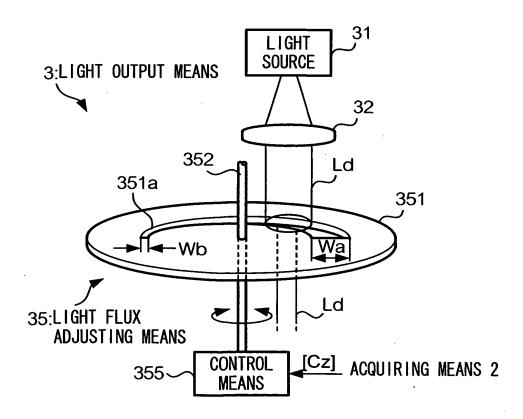


FIG. 12




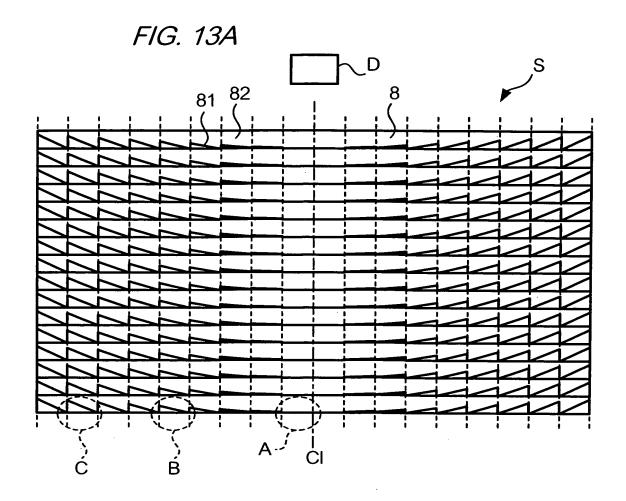


FIG. 13B

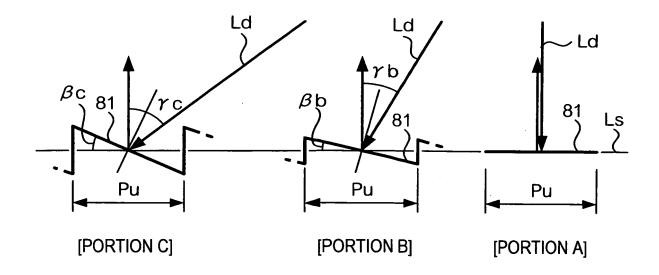

10/14

FIG. 14A

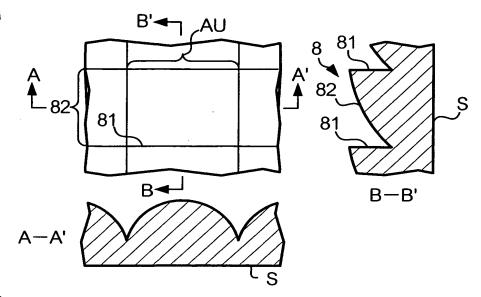


FIG. 14B


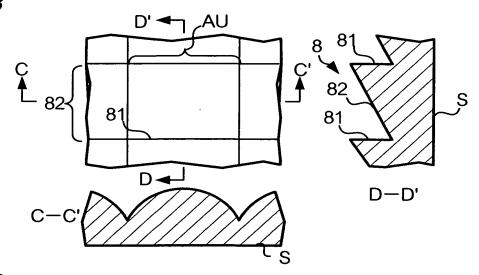


FIG. 14C

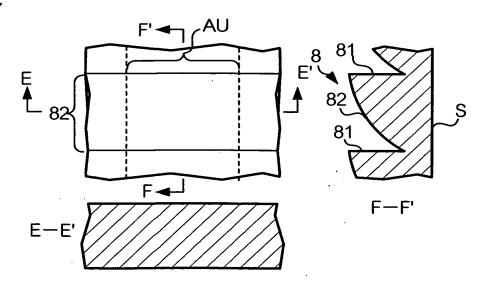

11/14

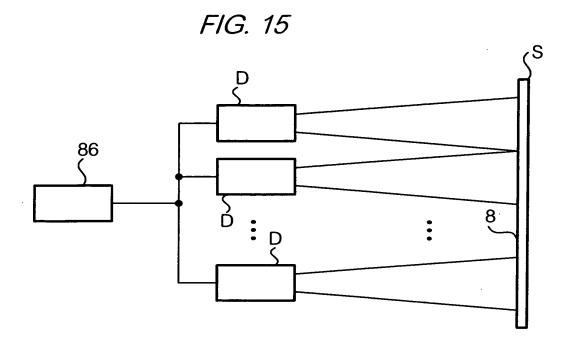


FIG. 16



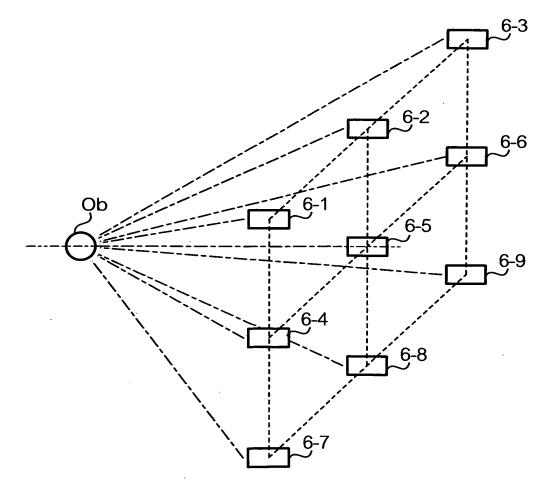


FIG. 17




13/14

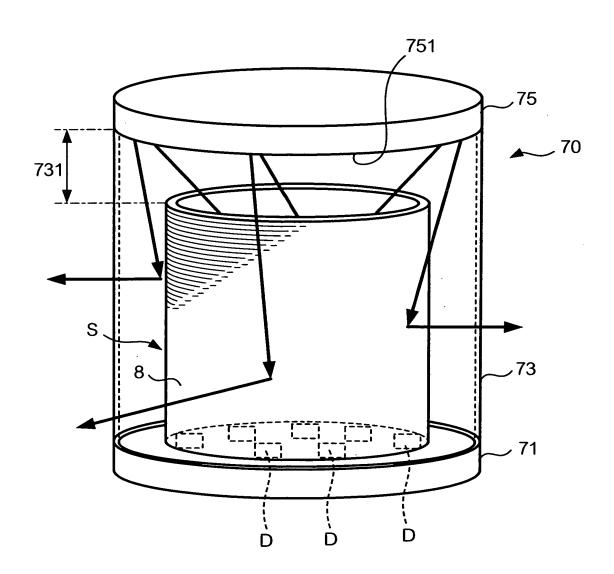

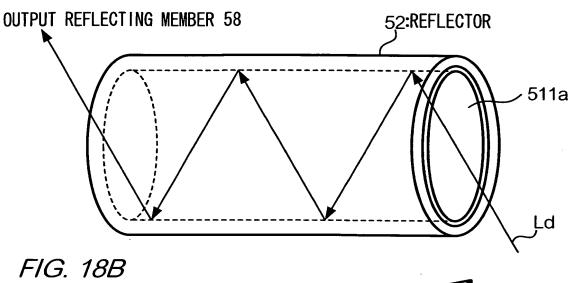

OUTPUT
REFLECTING
MEMBER 58
Ld

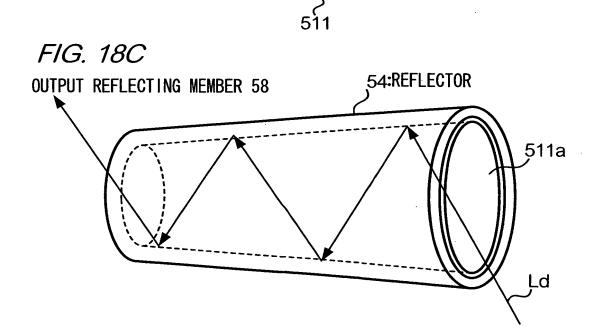

14/14

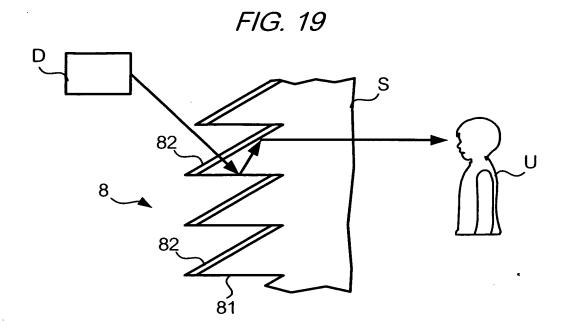


FIG. 20

